

WIRELESS LIGHT DIMMER KEY FOB

EN



Combination of iNELS switching element for universal use. It can be used to control electrical appliances, lights, sockets, garage doors, etc.

Content



Controller - key fob RF KEY-40/W, RF KEY-40/B




Universal dimmer, 1-channel
RFDEL-71B-SL

EAN 8595188183109 (key fob - black + Universal dimmer, 1-channel)


EAN 8595188183116 (key fob - white + Universal dimmer, 1-channel)

EAN 8595188183123 (key fob - black + 2 x Universal dimmer, 1-channel)

EAN 8595188183130 (key fob - white + 2 x Universal dimmer, 1-channel)

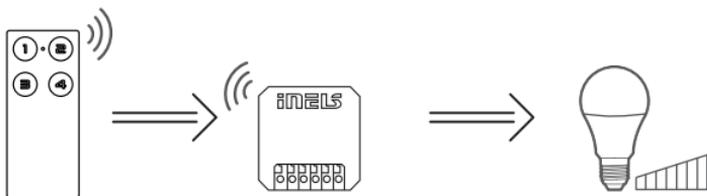

The individual **elements in the INELS set are paired** and their **functions are preset**. INELS kit with key fob enables the basic function of controlling electrical appliances - **ON / OFF**. The appliances can be controlled independently by a key fob.

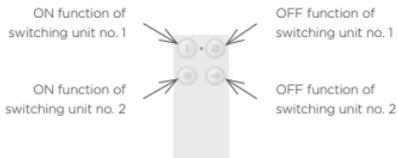



Controller – key fob RF KEY-40/W, RF KEY-40/B

Detailed manual



RF KEY 40

RF KEY 40/B – key fob , black


RF KEY 40/W – key fob , white

Characteristics

- Key fob-sized remote control - used to control, lights, gate, garage door, shutters, etc.
- 4 buttons, each of which allows you to control an unlimited number of components.
- Replaceable battery (3 V CR 2032 - included in the package) with a service life of approx. 5 years (depending on the frequency of use).


Insertion and replacement of a battery RF KEY-40

1




Use a coin to open the key fob and remove the front cover. Carefully tap the device out of the bottom cover.

2



Slide the CR2032 battery into the battery holder. Observe the polarity.

3



Insert the device into the bottom cover. Attach the front of the cover and click.

Safe handling



When handling a device unboxed it is important to avoid contact with liquids. Never place the device on the conductive pads or objects, avoid unnecessary contact with the components of the device.

Technical parameters**RF KEY-40**

Supply voltage:	3 V battery CR2032
Battery life:	about 5 years depending on the frequency of use
Transmission indication:	red LED
Number of buttons:	4
Communication Protocol:	RFIO
Frequency:	868.5 MHz
Signal transmission method:	one-way addressed message
Range:	in the open up to 200 m
Other data	
Operating temperature:	-10 ... +50 °C (14 ... 122 °F)
Operating position:	any
Colour design	white, black
Protection:	IP20
Pollution degree:	2
Dimensions:	64 x 25 x 10 mm
Weight:	16 g
Related standards:	EN 60669, EN 300 220, EN 301489, No 426/2000 Coll.

Attention

When you install iNELS RF Control system, you have to keep a minimal distance of 1 cm (0.4") between each unit. Between the individual commands must be an interval of at least 1s.



Universal dimmer, 1-channel RFDEL-71B-SL

Detailed manual




RFDEL-71B-SL

Characteristics

- The universal built-in dimmer is used to regulate light sources.
- They can be combined with detectors, controllers, iNELS RF Control or system components.
- 6 light functions - smooth increase or decrease with time setting 2s-30 min.
- When switched off, the set level is stored in the memory, and when switched back on, it returns to the most recently set value.
- The universal dimmer may be controlled by up to 25 channels (1 channel represents 1 button).
- Connection of the existing button on the control input "S" enables combination of wireless control with classic (wired) control.
- The programming button on the controller is also used for manual control of the output.
- Memory status can be pre-set in the event of a power failure. For components labelled as iNELS RF Control2 (RFIO2), it is possible to set the repeater function via the RFAF/USB service device.
- Range up to 200 m (in open space), if the signal is insufficient between the controller and unit, use the signal repeater RFRP-20 or protocol component RFIO2 that support this feature.

Installation options

mounting in an installation box

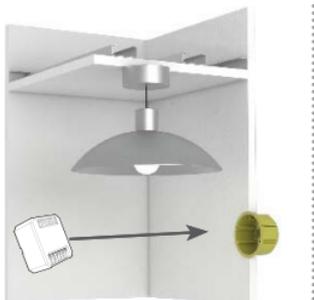

mounting into the ceiling light cover



Under ceiling mounted



Technical parametres**RFDEL-71B-SL**

Supply voltage:	230 V AC / 50 Hz
Apparent power:	5 VA
Dissipated power:	0.5 W
Supply voltage tolerance:	+10/ -15 %
Connection:	4 - wire, with NEUTRAL
Dimmed load:	R, L, C, LED, ESL
Output:	
Contactless:	2 x MOSFET
Load capacity:	140 W *
Control:	
RF command from the transmitter:	868.5 MHz
Range in open space:	up to 200 m
Manual control:	button PROG (ON/OFF), external button
Other data:	
Operating temperature:	-15 ... + 50 °C
Storage temperature:	-30 ... +70°C
Operating position:	any
Protection:	IP30 under normal conditions
Overvoltage category:	III.
Contamination degree:	2
Terminals (CY wire, Cross-section):	4 x 0.75 mm ²
Terminal length:	90 mm (3.5")
Dimensions:	43 x 44 x 22 mm
Weight:	30 g
Related standards:	EN 60730, EN 63044, EN 300 220, EN 301 489




* loadability of power factor $\cos \varphi=1$

Compatibility

The device can be combined with all system components, controls and devices of iNELS RF Control and iNELS RF Control².


The detector can be assigned an iNELS RF Control2 (RFIO2) communication protocol.

Connection

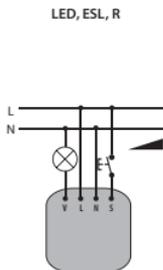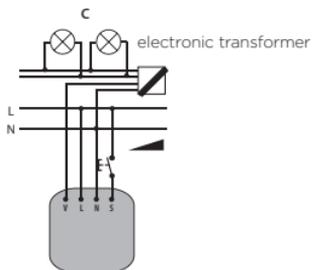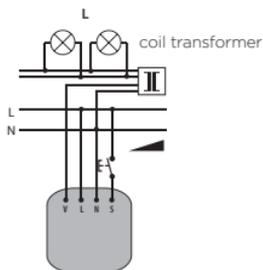

Radiofrequency signal penetration through various construction materials

Range up to 200 m in open space, if the signal is insufficient between the controller and unit, use the signal repeater RFRP-20 or protocol component RFIO2 that supports this feature.

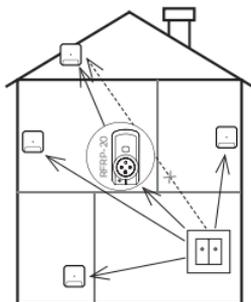

60 - 90 %	80 - 95 %	20 - 60 %	0 - 10 %	80- 90 %
brick walls	wooden structures with plaster boards	reinforced concrete	metal partitions	common glass

Warning

Instruction manual is designated for mounting and also for the usage of the device. It is always a part of its packing. Installation and connection can be carried out only by a person with adequate professional qualification with understanding this instruction manual and functions of the device, and while observing all valid regulations. Trouble-free function of the device also depends on transportation, storing and handling. In case you notice any sign of damage, deformation, malfunction or missing part, do not install this device and return it to its seller. It is necessary to treat this product and its parts as electronic waste after its lifetime is terminated. Before starting installation, make sure that all wires, connected parts or terminals are de-energized. While mounting and servicing observe safety regulations, norms, directives and professional, and export regulations for working with electrical devices. Do not touch parts of the device that are energized - life threat. Due to transmissivity of RF signal, observe correct location of RF components in a building where the installation is taking place. RF Control is designated only for mounting in interiors. Devices are not designated for installation into exteriors and humid spaces. The must not be installed into metal switchboards and into plastic switchboards with metal door - transmissivity of RF signal is then impossible. RF Control is not recommended for pulleys etc. - radio-frequency signal can be shielded by an obstruction, interfered, battery of the transceiver can get flat etc. and thus disable remote control.

Designed & manufactured by:

ELKO EP, s.r.o. Palackého 493, 769 01 Holešov, Všetuly, Czech republic
www.elkoep.com, Hotline: +420 800 100 671

