

WIRELESS SHUTTER CONTROL

(CLASSIC VERSION)

EN



Combination of iNELS wall-mounted wireless controller and shutter switching device.

Package




On-wall button controller PLASTIC - 2 buttons
RFWB-20/G




Switch unit for shutters
RFJA-32B-SL

EAN 8595788183147 (On-wall button controller PLASTIC - 2 buttons + Switch unit for shutters)

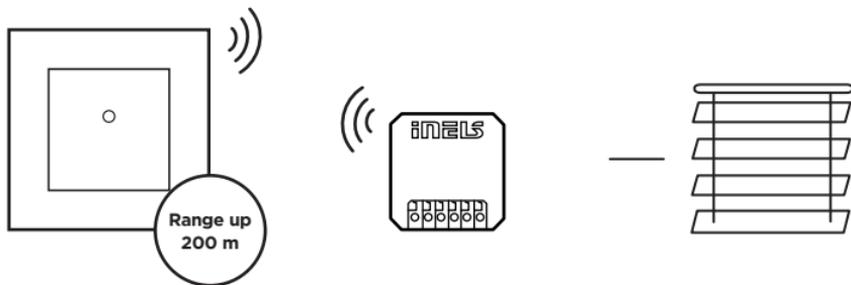

The individual **elements in the iNELS** set are paired and their **functions are preset**.
iNELS Wireless shutters control enables it's remote control.

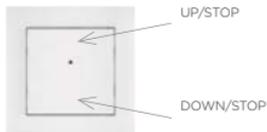

The settings of the wall controllers can be changed - see detailed manuals of iNELS elements.



On-wall button controller 2 buttons RFWB-20/G

Detailed manual




RFWB-20/G

Characteristics

- The wireless controller is used to control switches and dimmers (lights, gate, garage door, blinds, etc.).
- **RFWB-20/G**: two buttons enable control one or two units independently (depending on the type of switching element).
- The flat design with level base makes it ideal for fast installation on any surface (fixation with adhesive or screws in the installation box).


Replacement of a battery RFWB-20


- 

Using a screwdriver, carefully pry off the device from the frame.
- 

Gently pull to remove the cover.
- 

Slide the CR2032 battery into the battery holder. Observe the polarity.
- 

Snap on the cover. The LED opening must be located in the upper part (for the RFWB-40, observe the positioning of the left and right cover
- 

Place the frame on the rear part.
- 

Snap the device with the cover into the prepared frame.

Safe handling



When handling a device unboxed it is important to avoid contact with liquids. Never place the device on the conductive pads or objects, avoid unnecessary contact with the components of the device.

Technical parametres**RFWB-20/G**

Supply voltage:	3 V battery CR 2032
Transmission indication:	red LED
Number of buttons:	2
Transmitter frequency:	868.5 MHz
Signal transmission method:	unidirectionally addressed message
Range in free space:	up to 200 m
Other data	
Operating temperature:	-10 ... +50 °C (14 ... 122 °F)
Operating position:	any
Mounting:	glue, screws
Protection:	IP20
Contamination degree:	2
Dimensions:	85 x 85 x 16 mm (3.3" x 3.3" x 0.6")
LOGUS90 frame - plastic:	94 x 94 x 16 mm (3.7" x 3.7" x 0.6")
LOGUS90 frame - metal, glass, wood, granite:	38g * (1.3 oz)
Weight:	EN 60669, EN 300220, EN 301489 R&TTE Directive, Order. No
Related standards:	426/2000 Coll. (Directive 1999/EC)

* Comes with plastic frame.

Attention:

When you instal iNELS RF Control system, you have to keep minimal distance 1 cm between each units. Between the individual commands must be an interval of at least 1s.



Switch unit for shutters RFJA-32B-SL

Detailed manual



RFJA-32B-SL

Characteristics

- The switching unit for blinds has 2 output channels used to control garage doors, gates, blinds, awnings, etc...
- It can be combined with system components iNELS RF Control2 with RFIO2 protocol.
- The BOX design lets you mount it right in an installation box, a ceiling or motor drive cover.
- Short presses of the controller enable tilting of lamellas, and a long press enables you to draw the blinds up or down to the end position.
- Each of the units may be controlled by up to 25 channels (1 channel represents one assigned controller).
- The programming button on the unit is also used for manual control of the output.
- For components it is possible to set the repeater function via the RFAF / USB service device.
- Range up to 200 m (in open space), if the signal is insufficient between the controller and unit, use the signal repeater RFRP-20 or protocol component RFIO2 that support this feature.
- Communication frequency with bidirectional protocol iNELS RF Control2 (RFIO2).

Installation options

mounting into a non-conducting drive housing



flush mounting




ceiling mounted



Technical parameters**RFJA-32B-SL**

Supply voltage:	230 V AC / 50 - 60 Hz
Apparent input:	7 VA / $\cos \varphi = 0.1$
Dissipated power:	0.7 W
Supply voltage tolerance:	+10 -15 %
Output:	
Number of contacts:	2x switching (AgSnO ₂)
Rated current:	8 A / AC1
Switching power:	2000 VA / AC1
Peak current:	10 A / <3 s
Switching voltage:	250 V AC1
Control:	
RF, by command from transmitter:	868.5 MHz
Manual control:	PROG (STOP, ▲, STOP, ▼)
Other data:	
Operating temperature:	-15 ... + 50 °C (5 ... 122 °F)
Operating position:	any
Mounting:	free at lead-in wires
Protection:	IP30
Overvoltage category:	III.
Dimensions:	43 x 44 x 22 mm
Weight:	45 g
Related standards:	EN 60730, EN 63044, EN 300 220, EN 301 489

Connection

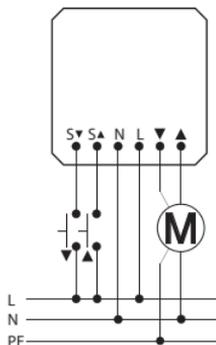


Indication, manual control

- LED STATUS - indication of the device status.
- Manual control is performed by pressing the PROG button.
- Programming is performed by pressing the PROG button for more than 1s.
- Terminal block for connection of buttons. IN1 - direction button up IN2- button down.


In the programming and operating mode, the LED on the component lights up at the same time each time the button is pressed - this indicates the incoming command

1. LED / button PROG
2. Addresses for individual relays (channels)
3. Terminal block - connection for external button
4. Terminal block - connecting the neutral conductor
5. Terminal block - load connection
6. Terminal block for connecting the phase conductor

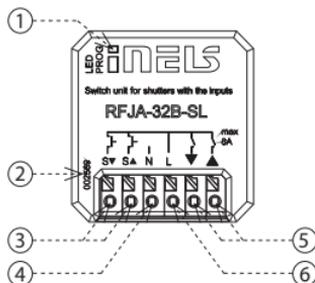

Radiofrequency signal penetration through various construction materials

Range up to 200 m in open space, if the signal is insufficient between the controller and unit, use the signal repeater RFRP-20 or protocol component RFIO² that supports this feature.

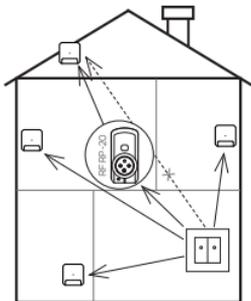

				
60 - 90 %	80 - 95 %	20 - 60 %	0 - 10 %	80- 90 %
brick walls	wooden structures with plaster boards	reinforced concrete	metal partitions	common glass

Warning

Instruction manual is designated for mounting and also for the usage of the device. It is always a part of its packing. Installation and connection can be carried out only by a person with adequate professional qualification with understanding this instruction manual and functions of the device, and while observing all valid regulations. Trouble-free function of the device also depends on transportation, storing and handling. In case you notice any sign of damage, deformation, malfunction or missing part, do not install this device and return it to its seller. It is necessary to treat this product and its parts as electronic waste after its lifetime is terminated. Before starting installation, make sure that all wires, connected parts or terminals are de-energized. While mounting and servicing observe safety regulations, norms, directives and professional, and export regulations for working with electrical devices. Do not touch parts of the device that are energized - life threat. Due to transmissivity of RF signal, observe correct location of RF components in a building where the installation is taking place. RF Control is designated only for mounting in interiors. Devices are not designated for installation into exteriors and humid spaces. The must not be installed into metal switchboards and into plastic switchboards with metal door - transmissivity of RF signal is then impossible. RF Control is not recommended for pulleys etc. - radio-frequency signal can be shielded by an obstruction, interfered, battery of the transceiver can get flat etc. and thus disable remote control.

Designed & Manufactured by:

ELKO EP, s.r.o. Palackého 493, 769 01 Holešov, Všetuly,
Czech republic, www.elkoep.com, Hotline: +420 800 100 671

